

# << 电容式传感器

## 金属圆柱形-M12



### 产品说明:

金属外壳，螺纹圆柱外形，直流三线输出，电位计调节，IP67防护等级，高亮LED指示。

### 参数:

型号	额定工作距离	安装方式	输出	电源电压	额定电流	开关频率	环境温度	接线方式	机械图
FC2-M12-OP6L	2mm	齐平	PNP NO	10...30VDC	≤200mA	50Hz	-25...70℃	2米电缆	图1
FC2-M12-ON6L	2mm	齐平	NPN NO	10...30VDC	≤200mA	50Hz	-25...70℃	2米电缆	图1
FC2-M12-CP6L	2mm	齐平	PNP NC	10...30VDC	≤200mA	50Hz	-25...70℃	2米电缆	图1
FC2-M12-CN6L	2mm	齐平	NPN NC	10...30VDC	≤200mA	50Hz	-25...70℃	2米电缆	图1
NC4-M12-OP6L	4mm	非齐平	PNP NO	10...30VDC	≤200mA	50Hz	-25...70℃	2米电缆	图2
NC4-M12-ON6L	4mm	非齐平	NPN NO	10...30VDC	≤200mA	50Hz	-25...70℃	2米电缆	图2
NC4-M12-CP6L	4mm	非齐平	PNP NC	10...30VDC	≤200mA	50Hz	-25...70℃	2米电缆	图2
NC4-M12-CN6L	4mm	非齐平	NPN NC	10...30VDC	≤200mA	50Hz	-25...70℃	2米电缆	图2
FC2-M12-OP6L-Q12	2mm	齐平	PNP NO	10...30VDC	≤200mA	50Hz	-25...70℃	M12连接器	图3
FC2-M12-ON6L-Q12	2mm	齐平	NPN NO	10...30VDC	≤200mA	50Hz	-25...70℃	M12连接器	图3
FC2-M12-CP6L-Q12	2mm	齐平	PNP NC	10...30VDC	≤200mA	50Hz	-25...70℃	M12连接器	图3
FC2-M12-CN6L-Q12	2mm	齐平	NPN NC	10...30VDC	≤200mA	50Hz	-25...70℃	M12连接器	图3
NC4-M12-OP6L-Q12	4mm	非齐平	PNP NO	10...30VDC	≤200mA	50Hz	-25...70℃	M12连接器	图4
NC4-M12-ON6L-Q12	4mm	非齐平	NPN NO	10...30VDC	≤200mA	50Hz	-25...70℃	M12连接器	图4
NC4-M12-CP6L-Q12	4mm	非齐平	PNP NC	10...30VDC	≤200mA	50Hz	-25...70℃	M12连接器	图4
NC4-M12-CN6L-Q12	4mm	非齐平	NPN NC	10...30VDC	≤200mA	50Hz	-25...70℃	M12连接器	图4

### 机械图:

图1

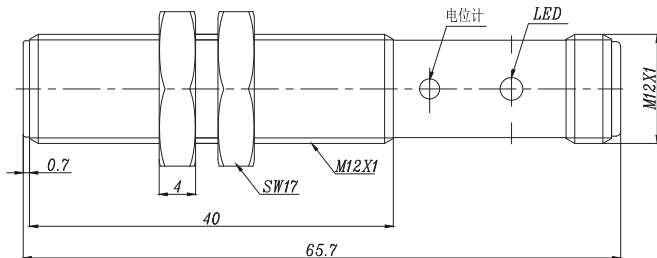


图2

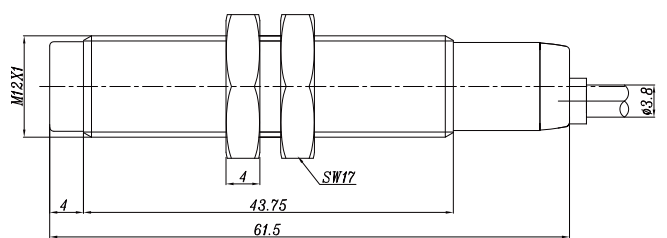


图3

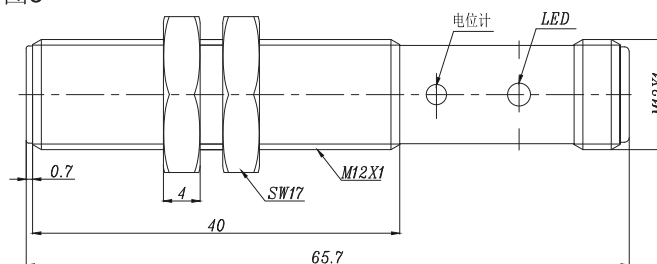


图4

