


<< 电感式传感器

金属圆柱形-H3/H4

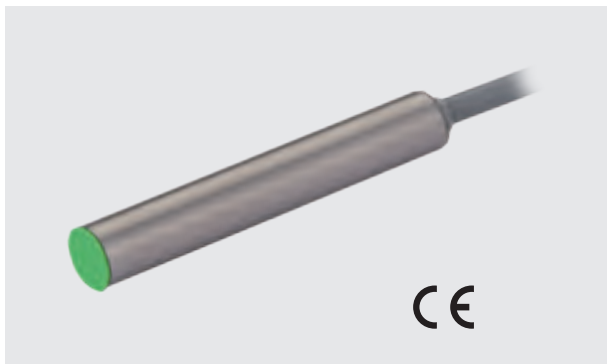

产品说明:

不锈钢金属外壳, 光滑圆柱外形, 直流三线输出, IP67防护等级, 高亮LED指示灯, 紧凑外形尺寸。

参数:

| 型号 | 额定工作距离 | 安装方式 | 输出 | 电源电压 | 额定电流 | 开关频率 | 环境温度 | 接线方式 | 机械图 |
|-----------------|--------|------|--------|------------|--------|--------|-----------|------|-----|
| FI0.8-KH03-OP6L | 0.8mm | 齐平 | PNP NO | 10...30VDC | ≤100mA | 2500Hz | -25...70℃ | 2米电缆 | 图1 |
| FI0.8-KH03-ON6L | 0.8mm | 齐平 | NPN NO | 10...30VDC | ≤100mA | 2500Hz | -25...70℃ | 2米电缆 | 图1 |
| FI0.8-KH03-CP6L | 0.8mm | 齐平 | PNP NC | 10...30VDC | ≤100mA | 2500Hz | -25...70℃ | 2米电缆 | 图1 |
| FI0.8-KH03-CN6L | 0.8mm | 齐平 | NPN NC | 10...30VDC | ≤100mA | 2500Hz | -25...70℃ | 2米电缆 | 图1 |
| FI1-KH04-OP6L | 1mm | 齐平 | PNP NO | 10...30VDC | ≤100mA | 2500Hz | -25...70℃ | 2米电缆 | 图2 |
| FI1-KH04-ON6L | 1mm | 齐平 | NPN NO | 10...30VDC | ≤100mA | 2500Hz | -25...70℃ | 2米电缆 | 图2 |
| FI1-KH04-CP6L | 1mm | 齐平 | PNP NC | 10...30VDC | ≤100mA | 2500Hz | -25...70℃ | 2米电缆 | 图2 |
| FI1-KH04-CN6L | 1mm | 齐平 | NPN NC | 10...30VDC | ≤100mA | 2500Hz | -25...70℃ | 2米电缆 | 图2 |

机械图:

图1

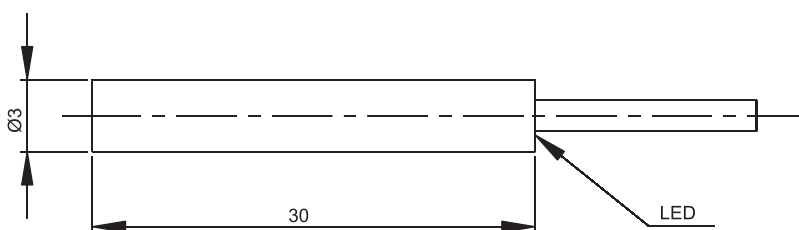


图2

